

CODE NUMBER

34001004

DESCRIPTION

1.6/0.8 gpf, Filtered, Polished Chrome Finish, Fixture Connection , Dual Flush, Battery with Hardwired Option, TruFlush Concealed Manual Electronic Hardwired Water Closet Flushometer.

DETAILS

- Flush Volume: 1.6/0.8 gpf (6.0/3 Lpf)
- Finish: Polished Chrome (CP)
- Power Type: Battery with Hardwired Option
- Bypass: Filtered
- Fixture Type: Water Closet

FEATURES

- Electroplated heavy duty metal wall plate
- Corrosion-resistant, vandal resistant plate
- Sloan waterproof electronic PCB with tactile push buttons
- Ability to hardwire with battery backup
- Includes four (4) AA size batteries



COMPLIANCES & CERTIFICATIONS



(UPC Certified)

ELECTRICAL SPECIFICATIONS

- Arming Delay: 8 seconds
- Control Circuit: 6 VDC Input/Solid State
- Solenoid Operator: 6 VAC
- Transformers (specify separately):
 - EL-386 (Up to 1 flushometer)
 - EL-451 (up to 6 flushometers)

VALVE OPERATING PRESSURE (FLOWING)

20–80 PSI (138–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- [TRF 8900 Electronic Dual Flush Wall Plate Installation Instructions](#)

NOTES

All information contained within this document subject to change without notice.


WARRANTY

[View Warranty Information](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

ROUGH-IN

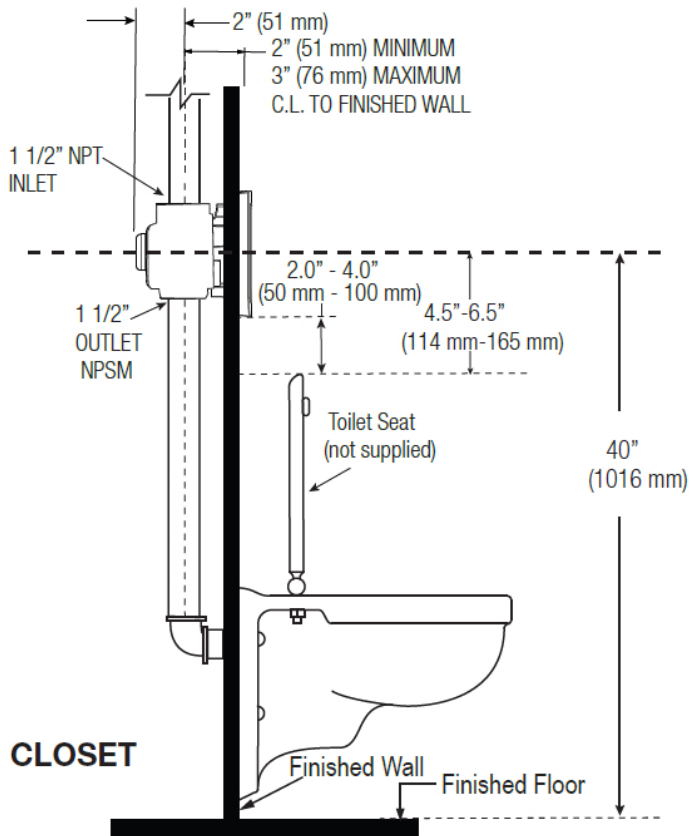

NOTE : Flush Connections shown in dotted lines not included.

